


## DVU Series

- For Separators/Scrubbers to 2000 psi (13.8 MPa) [138 bar] Working Pressure
- Hex Union Allows Plug and Seat Replacement Without Piping Removal
- Operates on 30–70 psi (2.07–4.83 kPa) [2.07–4.83 bar] Control Pressure
- Compatible With Murphy Level Controls
- Soft Seat Valve
- Manual Valve Operator

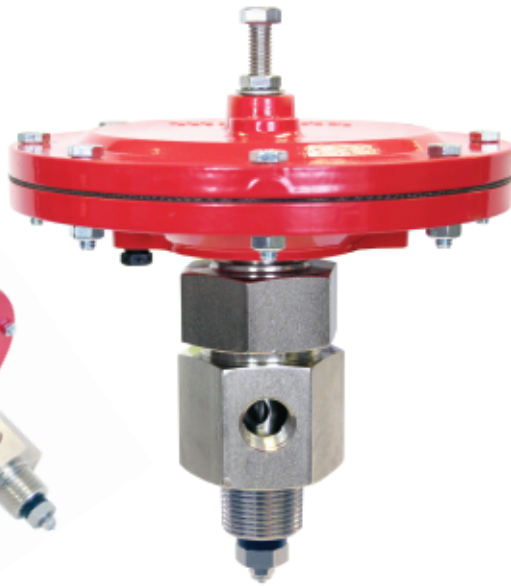

### Description

The DVU Series are pneumatically controlled dump valves. The valves open and close automatically by pneumatic control from a Murphy LS200NDVOR or similar level controller and dump valve operator. Diaphragm actuated, the DVU series dump valves operate at 30–70 psi (2.07–4.83 kPa) [2.07–4.83 bar] and up to 2000 psi (13.8 MPa) [138 bar] vessel pressure (depending on the model).

A key benefit of this design is a hex union that provides the ability to replace the seat without removing the valve from piping.

### Application

Designed for gas compressor scrubbers, the DVU Series can be used to dump any liquids compatible with its specifications.

### Specifications

#### Operating Temperature:

-30 to 250°F (-34.4 to +121°C)

#### Valve Operating Pressure: See chart below.

#### Maximum Working Pressure:

**DVU150 and DVU175:** 1800 psi (12.4 MPa) [124 bar].

**DVU2105:** 500 psi (3.44 MPa) [34 bar].

**DVU2115:** 1500 psi (10.3 MPa) [103 bar].

**DVU2120:** 2000 psi (13.8 MPa) [138 bar].


**Body Material:** Electroless Nickel Plated 12L14 Carbon Steel.

#### Internal Wetted Parts:


Plug Seal: 90 Durometer Urethane.

Other: 303 stainless steel; Electroless Nickel Plated 12L14 Carbon Steel.

### Dimensions

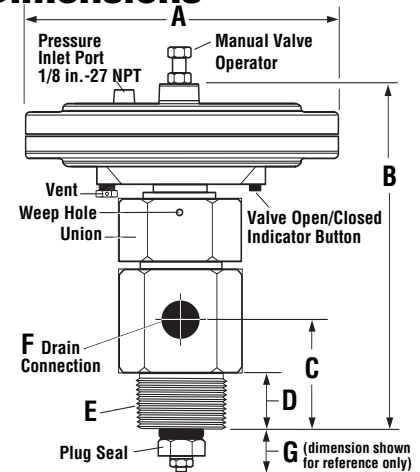


### Pressure vs. Flow (DVU150/175)

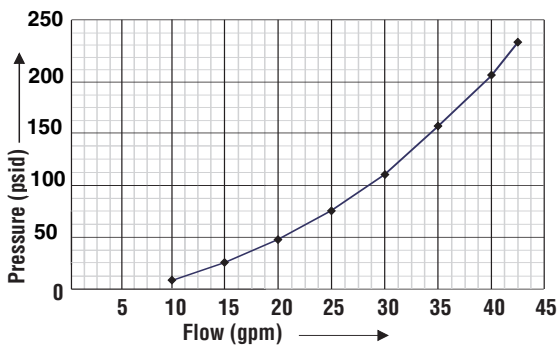

Model	A	B	C	D	E	F	G
DVU2120	7.50 (191)	8.0 (203)	2.75 (70)	1.0 (25)	2-11.5 NPT	1-11.5 NPT	1.03
DVU2115	7.50 (191)	8.0 (203)	2.75 (70)	1.0 (25)	2-11.5 NPT	1-11.5 NPT	1.03
DVU2105	7.50 (191)	8.0 (203)	2.75 (70)	1.0 (25)	2-11.5 NPT	1-11.5 NPT	1.03
DVU175	7.50 (191)	6.75 (171)	2.06 (52)	1.0 (25)	1-11.5 NPT	3/4"-14 NPT	1.03
DVU150	7.50 (191)	6.75 (171)	2.06 (52)	1.0 (25)	1-11.5 NPT	1/2"-14 NPT	1.03

NOTE: Dimensions are in inches and (millimeters)

### Control Pressure vs. Working Pressure

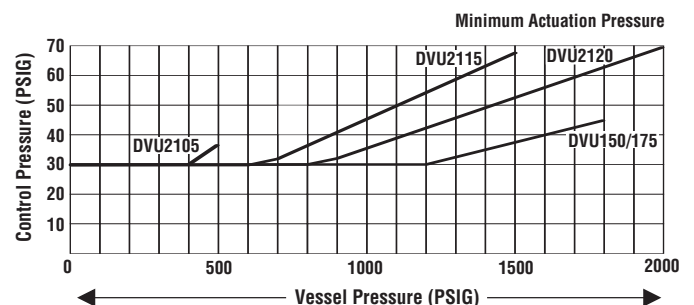

## Scrubber Level Systems (SLS)

(Includes LS200, LS200NDVOR and DVU valve.

SLS2120: Includes DVU2120 valve

SLS2115: Includes DVU2115 valve

SLS2105: Includes DVU2105 valve

SLS175: Includes DVU175 valve

SLS150: Includes DVU150 valve

-LR: Less Regulator option

## Replacement Parts

**Typical Seal Kit includes:** Nut, Washer (1 to 3), "O" Ring, Plug and Seal, Seat, Crush Washer.

**Typical Diaphragm Repair Kit includes:** Diaphragm, Diaphragm Washer (upper), Diaphragm Nut, Diaphragm Plate (1 or 2 pcs.), Packing, "O" Ring, Stem, Seal Washer for Maintenance Bolt.

### Part No. Description

#### DVU2120

55-00-0237 Seal Kit (includes plug)  
55-00-0236 Diaphragm Kit

#### DVU2115

55-00-0241 Seal Kit (includes plug)  
55-00-0240 Diaphragm Kit

#### DVU2105

55-00-0245 Seal Kit (includes plug)  
55-00-0244 Diaphragm Kit

#### DVU175

55-00-0230 Seal Kit (includes plug)  
55-00-0231 Diaphragm Kit

#### DVU150

55-00-0230 Seal Kit (includes plug)  
55-00-0231 Diaphragm Kit

## Shipping Weights

DVU150 and DVU175: 9 lbs. (4 kg.).

DVU150SS and DVU175SS: 9 lbs. (4 kg.)

DVU2105, DVU2115, DVU2120: 14 lbs. (6.4 kg.)

## Shipping Dimensions

8 x 8 x 12 in. (203 x 203 x 305 mm.).

## The Murphy Gas Compressor Scrubber Level System (SLS)

The system provides for liquid control in gas scrubber applications, by dumping liquids to drain and protecting compressors with a high liquid level switch. Wetted metal parts are made to survive constant use in corrosive environments. See Bulletin: SLS-04005B for more details.

### Filter/Regulator & MURPHYGAGE®

"Instrument Quality Air/Gas Supply"

### Pneumatic Level Control

Float actuated level snap-acting switch controls pneumatic pressure to open and close dump valve. LS200NDVOR: Dump Valve Operator, pressure regulator, and pressure indicating MURPHYGAGE.®

### High Level Shutdown Switch

Stainless steel float actuated level switches to alarm and/or shutdown the equipment.

LS200: 2" NPT pipe connection; Rated 2000 psi (13.7MPa) [137bar]; Class I, Division 1. SPDT snap-switch standard. DPDT Optional.

All Stainless Steel available.

### Control Panel

### Pneumatic Dump Valves See DVU-01069B for more details.

Two piece union design with manual valve operator allows soft plug and hard seat to be replaced without disassembling outlet piping or scrubber pipe connection. Diaphragm actuated valves operate on 30-70 psi (207-483 kPa; 2-5 bar).

## How to Order Specify model number:

Model	Inlet	Outlet	Trim Size	Working Max. Press.
DVU2120	2 NPT	1 NPT	0.436 in. (11 mm)	2000 psi.
DVU2115	2 NPT	1 NPT	0.576 in. (15 mm)	1500 psi.
DVU2105	2 NPT	1 NPT	0.859 in. (22 mm)	500 psi.
DVU175	1 NPT	3/4 NPT	0.359 in. (9 mm)	1800 psi.
DVU175SS	1 NPT	3/4 NPT	0.359 in. (9 mm)	1800 psi.
DVU150	1 NPT	1/2 NPT	0.359 in. (9 mm)	1800 psi.
DVU150SS	1 NPT	1/2 NPT	0.359 in. (9 mm)	1800 psi.

## Warranty

A limited warranty on materials and workmanship is given with this FW Murphy product.

A copy of the warranty may be viewed or printed by going to [www.fwmurphy.com/support/warranty.htm](http://www.fwmurphy.com/support/warranty.htm)

### FW MURPHY

P.O. Box 470248  
Tulsa, Oklahoma 74147 USA  
+1 918 317 4100 Fax: +1 918 317 4266  
E-mail: sales@fwmurphy.com

### INDUSTRIAL PANEL DIVISION

Fax: +1 918 317 4124  
E-mail: ipdsales@fwmurphy.com

### MURPHY POWER IGNITION

Web site: www.murphy-pi.com

### CONTROL SYSTEMS & SERVICES DIVISION

P.O. Box 1819  
Rosenberg, Texas 77471 USA  
Phone: +1 281 633 4500 Fax: +1 281 633 4588  
E-mail: sales@fwmurphy.com

### FRANK W. MURPHY, LTD

Church Rd Laverstock  
Salisbury SP1 1GZ UK  
Phone: +44 172 241 0055 Fax: +44 172 241 0088  
E-mail: sales@fwmurphy.co.uk  
Web site: www.fwmurphy.co.uk

### COMPUTRONIC CONTROLS, LTD

41 - 43 Railway Terrace  
Nechells, Birmingham B7 5NG UK  
Phone: +44 121 327 8500 Fax: +44 121 327 8501  
E-mail: sales@computroniccontrols.com  
Web site: www.computroniccontrols.com

[www.fwmurphy.com](http://www.fwmurphy.com)

### FW MURPHY INSTRUMENTS (HANGZHOU) CO. LTD

77 23rd Street  
Hangzhou Economic & Technological Development Area  
Hangzhou, Zhejiang 310018 China  
Phone: +86 571 8788 6060 Fax: +86 571 8684 8878

### FW MURPHY INTERNATIONAL TRADING (SHANGHAI) CO., LTD.

Suite 1704, Tower B, City Center of Shanghai; 100 Zunyi Road  
Shanghai, 200051 China  
Phone: +86 21 6237 2082 Fax: +86 21 6237 2083  
Web site: mhong@fwmurphy.com



ISO 9001  
REGISTERED

Printed in U.S.A.